



WINDPROOF Module

Redefining Reliability

JW-HD132N-R2

Backbone Steel Frame
3X
stronger than traditional aluminum frames

Pass **60m/s**
Wind Tunnel Test
= Level 17 Typhoon

650W
Maximum Power Output

24.1%
Maximum Module Efficiency

0-+3%
Power Output Tolerance



High Reliability

- Snowstorm Resistance
- Hail Resistance
- Hurricane Resistance
- Burst Resistance
- Lower Temperature Coefficient
- Lower Operating Temperature
- Lower Hot Spot Temperature



Higher Energy Yield

J-TOPCon New technology
Higher module efficiency, higher energy yield
Lower system BOS cost, lower LCOE, and higher ROI




Lower Carbon Emissions

Compared with traditional aluminum frames, carbon emissions of steel frames are reduced by 73.3%



IEC 61215(2021)/IEC 61730(2021)/IEC 61701/IEC 62716
ISO 9001:2015: Quality Management System
ISO 14001:2015: Environment Management System
ISO 45001:2018: Occupational health and safety
IEC 62941:2019: Quality system for PV module manufacturing

Linear Performance Warranty

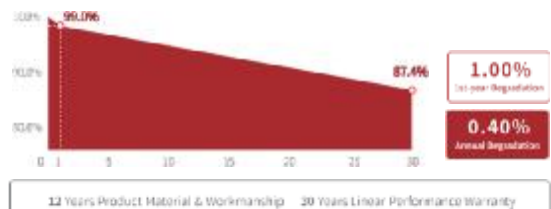

Version 2025.11 ©Jolywood (Taizhou) Solar Technology Co., Ltd. All rights reserved.

Add: No.6 Kaiyang Rd., Jiangyan Economic Development Zone, Taizhou, Jiangsu Province, China, 225500

TEL: +86 523 80612799

Email: info@jolywood.cn

www.jolywood.com



@Jolywood Solar

JW-HD132N | n-type Bifacial Dual-Glass Windproof Module

Electrical Properties	STC*					
Testing Condition	Front Side	Front Side	Front Side	Front Side	Front Side	Front Side
Peak Power (Pmax) (W)	625	630	635	640	645	650
MPP Voltage (Vmp) (V)	41.45	41.63	41.24	41.40	41.56	41.72
MPP Current (Imp) (A)	15.08	15.13	15.40	15.46	15.52	15.58
Open Circuit Voltage (Voc) (V)	49.19	49.30	49.50	49.70	49.90	50.10
Short Circuit Current (Isc) (A)	16.05	16.15	16.31	16.37	16.43	16.49
Module Efficiency (%)	23.1	23.3	23.5	23.7	23.9	24.1

*STC: Irradiance 1000 W/m², Cell Temperature 25°C, AM1.5
The data above is for reference only and the actual data is in accordance with the practical testing
Power Measurement Tolerance ±3%

Electrical Properties	NMOT*					
Testing Condition	Front Side	Front Side	Front Side	Front Side	Front Side	Front Side
Peak Power (Pmax) (W)	468	472	476	479	483	487
MPP Voltage (Vmp) (V)	39.69	39.86	39.49	39.64	39.79	39.95
MPP Current (Imp) (A)	11.80	11.84	12.04	12.09	12.14	12.19
Open Circuit Voltage (Voc) (V)	47.10	47.20	47.40	47.59	47.78	47.97
Short Circuit Current (Isc) (A)	12.96	13.04	13.17	13.22	13.27	13.32

*NMOT: Irradiance 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s

Electrical Properties Under Different Rear Gain				JW-HD132N-R2-645 S	
Power Gain (%)	Peak Power (Pmax) (W)	MPP Voltage (Vmp) (V)	MPP Current (Imp) (A)	Open Circuit Voltage (Voc) (V)	Short Circuit Current (Isc) (A)
10	709.5	41.56	17.07	49.90	18.07
15	741.8	41.56	17.85	49.90	18.89
20	774.0	41.66	18.58	50.00	19.68
25	806.3	41.66	19.35	50.00	20.50
30	838.5	41.66	20.13	50.00	21.32

Operating Properties	
Operating Temperature	-40°C ~ +85°C
Maximum System Voltage	1500V (IEC)
Maximum Series Fuse Rating	35A
Bifaciality*	80%
Maximum Static Load*	Front side 8100Pa, Rear side 3000Pa


*Bifaciality = Pmaxrear (STC) / Pmaxfront (STC), Bifaciality tolerance: ±5%
*For detailed information, please refer to the Installation Manual

Temperature Coefficient	
Temperature Coefficient of Pmax*	-0.280%/°C
Temperature Coefficient of Voc	-0.250%/°C
Temperature Coefficient of Isc	+0.045%/°C
Nominal Operating Cell Temperature	45±2°C


Specification	
Number of Cells	132pcs
Module Dimension	2382mm*1134mm*30mm
Weight	34.8kg
Front / Rear Glass*	2.0mm*2.0mm Heat-strengthened glass
Frame	Aluminum-Magnesium-Zinc Coated Steel
Junction Box	IP68 (3 diodes)
Length of Cable	4.0mm ² , +300mm/-180mm (Cable length can be customized)
Packaging Configuration	36pcs/Pallet, 684pcs/40HQ Container

*The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Jolywood (Taizhou) Solar Technology Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.


Engineering Drawing (unit: mm)

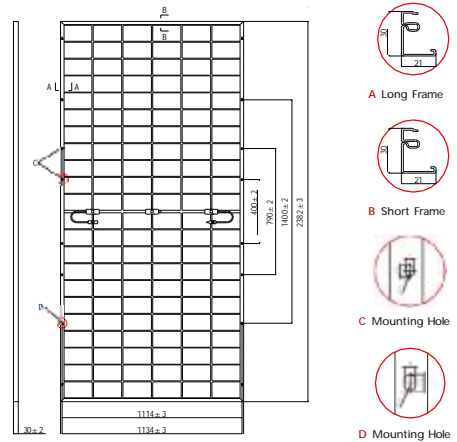

Characteristic Curves | JW-HD132N-R2-645S

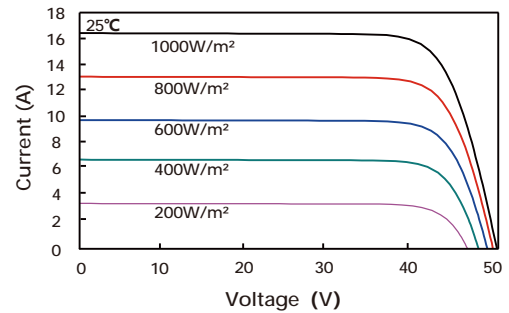

I-V Characteristics At Different Irradiations

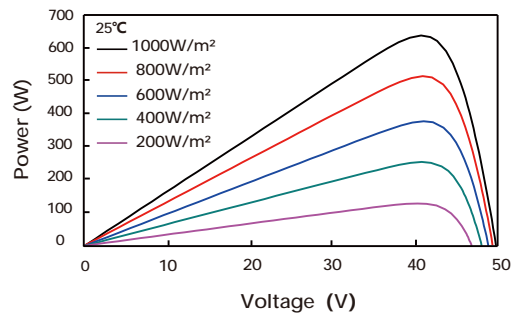

P-V Characteristics At Different Irradiations



Add: No.6 Kaiyang Rd., Jiangyan Economic Development Zone,
Taizhou, Jiangsu Province, China, 225500
TEL: +86 523 80612799
Email: info@jolywood.cn

